

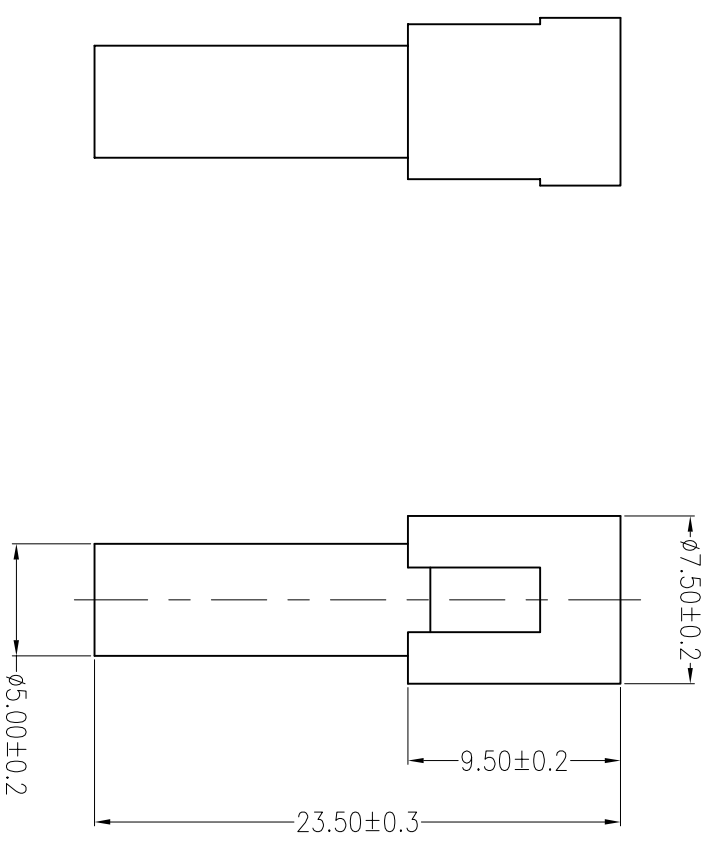


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	张一荣	2013.07.17

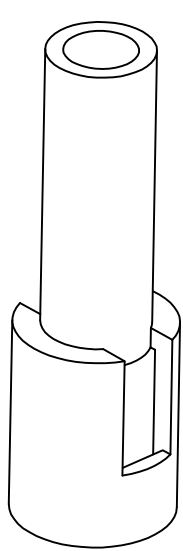

主要技术参数 Main Specifications

接线数 (Poles): 01
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 5.0A AC DC
 耐电压 (Withstand Voltage): 1500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$
 ORDER INFORMATION:

C1581R-01-A5W-P
 PART No.: _____
 No. OF CIRCUITS: _____
 PACKAGING: _____
 P=PE
 PLASTIC MATERIAL: _____
 A5W=PA66 (White)

ITEM	COMPONENT	QTY	MATERIAL	FINISH
A	PEDESTAL	1 PCS	PA66	COLOR: WHITE

JKUN 温州健坤连接器有限公司 WENZHOU JKUN CONNECTOR CO., LTD.		TITLE: - 1.58mm PITCH Housing	
X: ± 0.5 Y: ± 0.3 Z: ± 0.25	X: $\pm 5^{\circ}$ Y: $\pm 2^{\circ}$ Z: $\pm 1^{\circ}$	USE: CUSTOMER APPD: 邵敬和 CHKD: 田峰	PART NO.: C1581R-01-A5W-P DWG NO.: JKUN/GCCP-0593 SCALE: 1:1
UNITS: mm DR: 蒋建银	SHEET 1 / 1		