
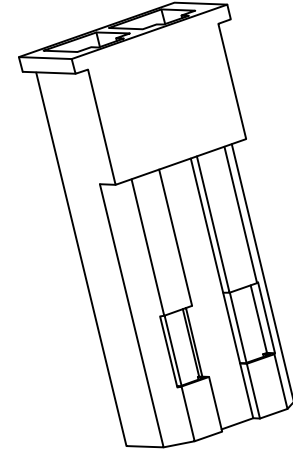
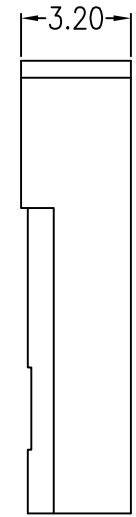
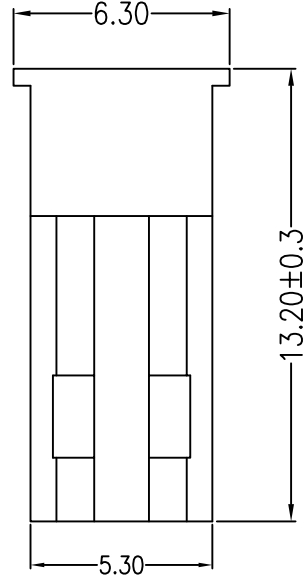


REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2013.08.05




主要技术参数 Main Specifications

- 线 数 (Poles): 02
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 3.0A AC DC
- 耐 电 压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

C2502P-02-A5W-P			
PART No.		PACKAGING:	
No. FOR CIRCUITS:	02	P=PE	
		PLASTIC MATERIAL:	
		A5W=PA66 (BEIGE)	
		A5R=PA66 (RED)	

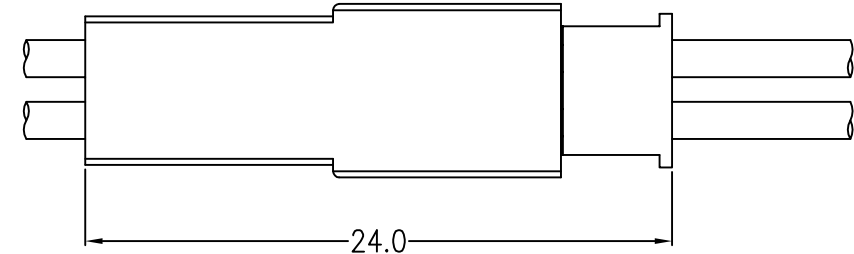

Assembly Layout

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	PEDESTAL	1 PCS	PA66	
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.				TITLE: -
X.±0.5	X.±5'	USE:	CUSTOMER	PART NO.:
.X±0.3	.X±2'	APPD:	邵敬和	C2502P-02-A5W-P
.XX±0.25	.XX±1'	CHKD:	田峰	DWG NO.:
--	--	DR:	吴丹平	JKUN/GCCP-0600
⊕	◁	UNITS:	mm	SCALE
				1 : 1
				SHEET
				1 / 1