

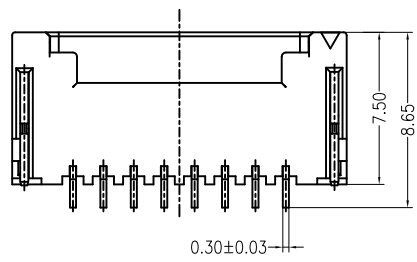
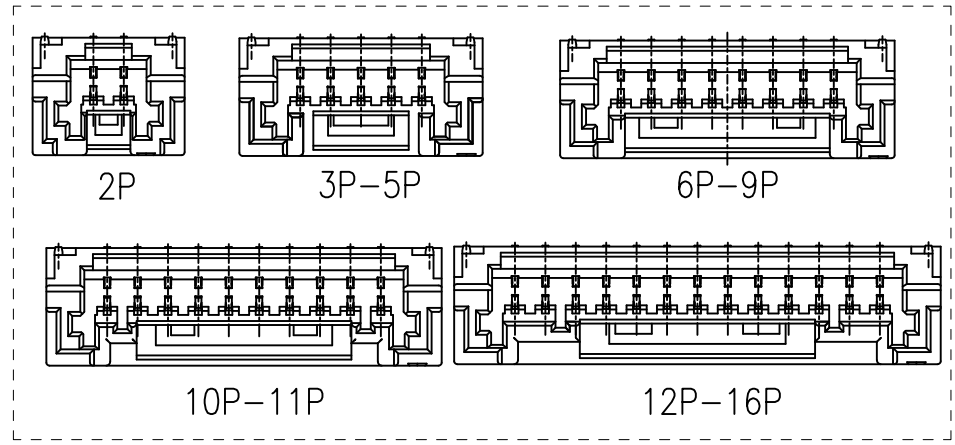
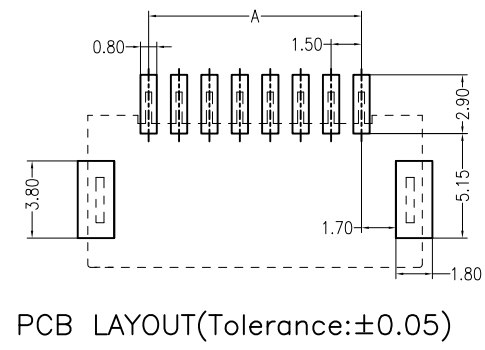


REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	FangSongLe	2020/08/07

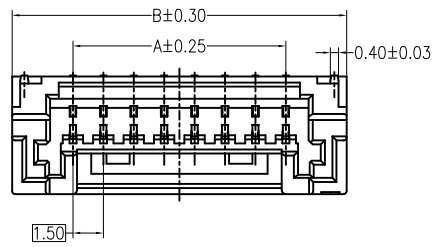



Specifications:
 Poles: 02 to 16
 Contact resistance: ≤20mΩ
 Insulation resistance: ≥500MΩ
 Rated voltage: 100V AC DC
 Rated current: 2.0A AC DC
 Withstand Voltage: 500V AC/minute
 Temperature Range: -25°C ~ +85°C
 Housing: PA9T UL94V-0, Natural
 Contacts: PhosphorBronze/ Sn-plated
 Solder tabs: Brass/ Sn-plated

ORDER INFORMATION:

A1507AWR--D1MA1-R**

PART No.:	PACKAGING:
No. OF CIRCUITS:	R=REEL
02-16P	Metal code:
PLASTIC MATERIAL:	1=PhosphorBronze
D1M=PA9T	PLATING:
	A= Sn

PIN.	DIM A	DIM B	PIN.	DIM A	DIM B
2pin	1.50	7.50	10pin	13.50	19.50
3pin	3.00	9.00	*11pin	15.00	21.00
4pin	4.50	10.50	*12pin	16.50	22.50
5pin	6.00	12.00	*13pin	18.00	24.00
6pin	7.50	13.50	*14pin	19.50	25.50
7pin	9.00	15.00	*15pin	21.00	27.00
8pin	10.50	16.50	*16pin	22.50	28.50
9pin	12.00	18.00			

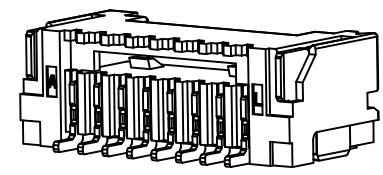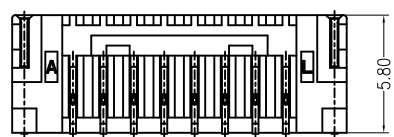

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.		TITLE: 1.50 Pitch Wafer 90° SMT	
GENERAL TOLERANCE		USE:	PART NO.:
X. ±0.50	X. ±5°	CUSTOMER	A1507AWR-**-D1MA1-R
X.X ±0.30	X.X ±2°	APPD: Liuzhengling	DWG NO.:
X.XX ±0.20	X.XX ±1°	CHKD: Steven	JKUN-GCKH-0851
UNITS: mm		DR: FangSongLe	SCALE
			1 : 1
			SHEET
			1 / 1