
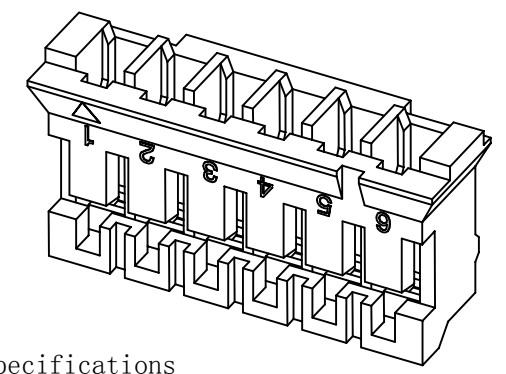
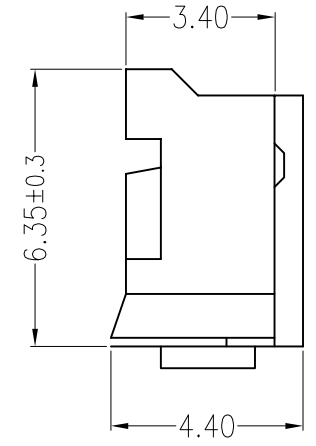


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.06.21

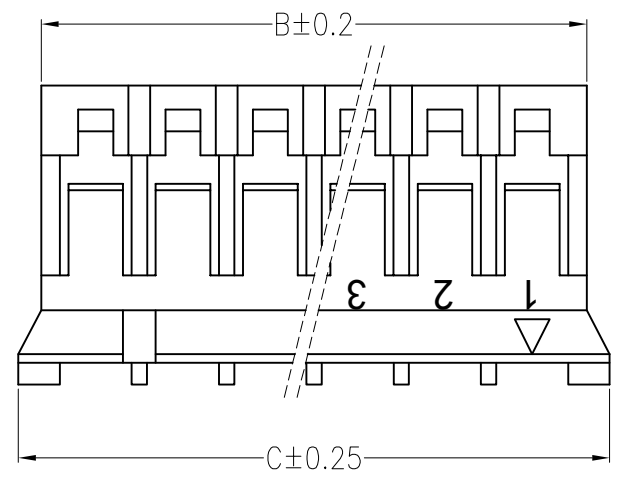

**主要技术参数 Main Specifications**


- 线数 (Poles): 02 to 16
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 2.0A AC DC
- 耐电压 (Withstand Voltage): 800V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

**ORDER INFORMATION:**

**A2001Y-\*\*-A5W-P**

PART No. \_\_\_\_\_ PACKAGING: P=PE

6No. OF CIRCUITS: 02~16 PLASTIC MATERIAL: A5W=PA66 (WHITE)

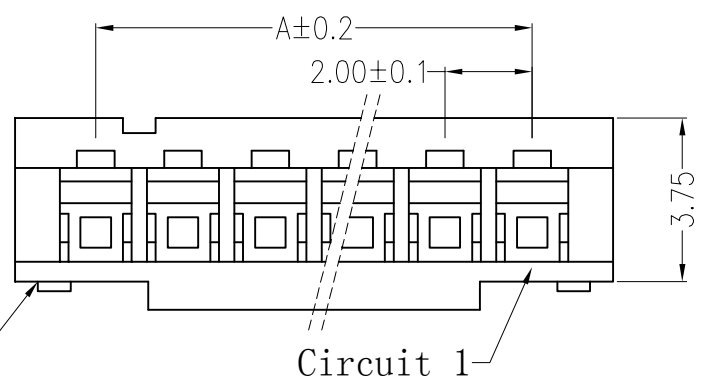

Circuits	Dimensions (mm)		
	A	B	C
02	2.00	4.50	5.70
03	4.00	6.50	7.70
04	6.00	8.50	9.70
05	8.00	10.50	11.70
06	10.00	12.50	13.70
07	12.00	14.50	15.70
08	14.00	16.50	17.70
09	16.00	18.50	19.70
10	18.00	20.50	21.70
11	20.00	22.50	23.70
12	22.00	24.50	25.70
13	24.00	26.50	27.70
14	26.00	28.50	29.70
15	28.00	30.50	31.70
16	30.00	32.50	33.70

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	PEDESTAL	1 PCS	PA66	COLOR:WHITE UL 94-V0

**JKUN 温州健坤接插件有限公司**  
**WENZHOU JKUN CONNECTOR CO., LTD.**

TITLE: A2001Y  
 2.0mmPITCH Housing

PART NO.:  
 A2001Y-\*\*-A5W-P

DWG NO.:  
 JKUN/GCCP-0527

SCALE: 1 : 1

SHEET: 1 / 1

X.±0.5	X.±5'	USE: CUSTOMER
.X±0.3	.X±2'	
.XX±0.25	.XX±1'	APPD: 邵敬和
--	--	CHKD: 田峰
	UNITS: mm	DR: 蒋建银