

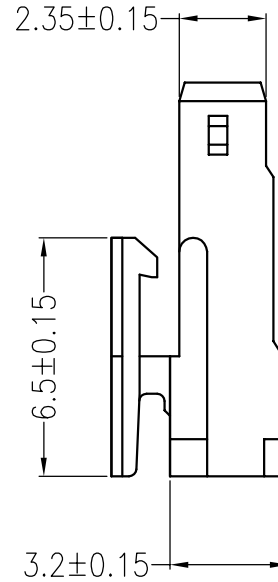


客户料号:

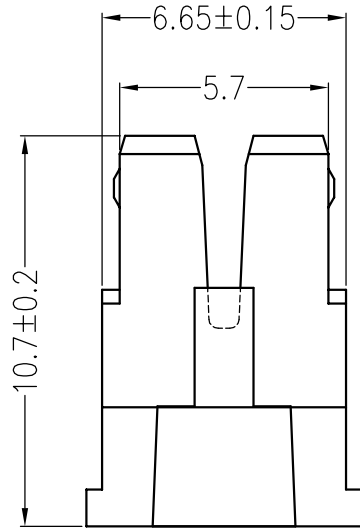

主要技术参数 Main Specifications

线 数 (Poles): 02
 接触电阻 (Contact resistance): $\leq 10m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 500M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐电压 (Withstand Voltage): 3800V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A3502Y-02-A5W-P	
PART No.	PACKAGING: R-REEL P-PE
No. OF CIRCUITS: 02	PLASTIC MATERIAL: A5W=PA66 (WHITE)

JKUN 温州健坤接插件有限公司
WENZHOU JKUN CONNECTOR CO., LTD.

APPROVED BY


邵敬和

CHECKED BY

伏何

DRAWN BY

吴丹平



DATE

2016.07.25

UNIT

mm

SCALE

FULL

SHEET

1/1

TOLERANCE

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

ANGLE

X° ±3.0°

REV

A/0

EC# NO

REVISION RECORD

NAME

DATE

NO.

DESCRIPTION

QTY

MATERIAL

PLATING/COLOR

NEW RELEASE

吴丹平

2016.07.25

A

Insulator

1

PA66

White

MODEL NAME: 3.50mm PITCH Housing

DwgNo. JKUN/GCCP-0568