

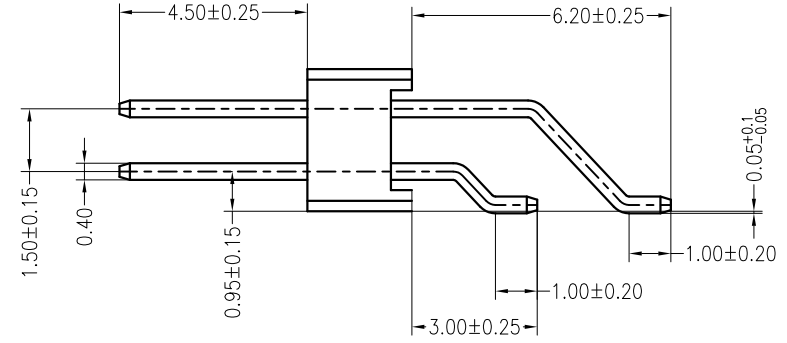





REV	ECN No.	DESCRIPTION	DESIGN	DATE
AO	-	Release	蒋建银	2018.10.30

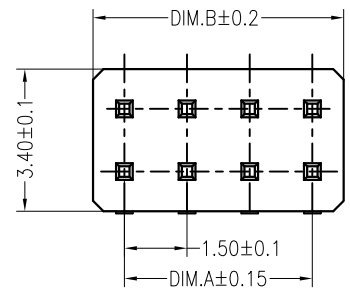

主要技术参数 Main Specifications

- 线 数 (Poles): 04 to 16
- 接触电阻 (Contact resistance): $\leq 30m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 500M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐 电压 (Withstand Voltage): 500V AC/minute
- 温度范围 (Temperature Range): $-40^{\circ}C \sim +110^{\circ}C$

ORDER INFORMATION:

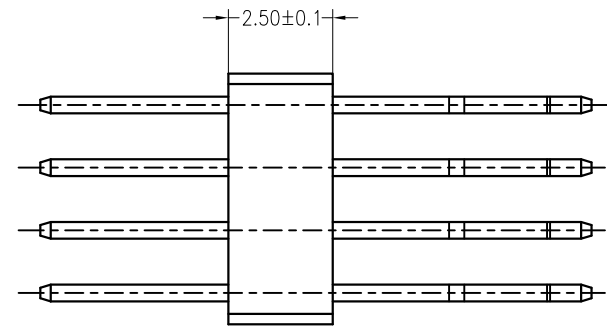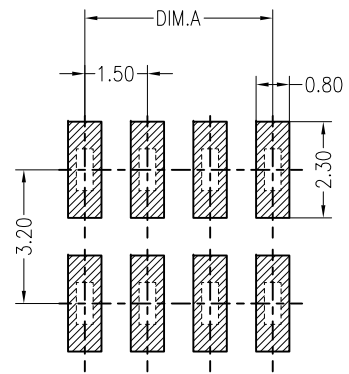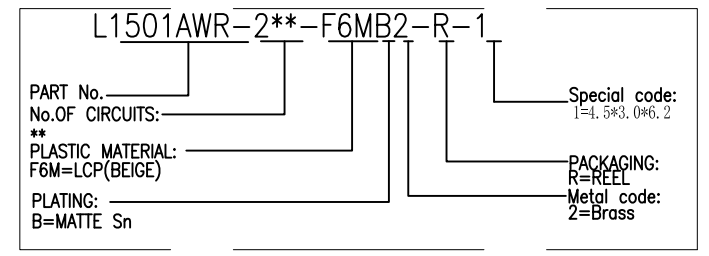

ROMMENDED PCB LAYOUT
TOLERANCE ± 0.05

PIN.	DIM A	DIM B
2*2	1.50	3.00
2*3	3.00	4.50
2*4	4.50	6.00
2*5	6.00	7.50
2*6	7.50	9.00
2*7	9.00	10.50
2*8	10.50	12.00

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B	CONTACT	n PCS	Brass	MATTE Sn-plated
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.		TITLE: -	
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.: L1501AWR-2**-F6MB2-R-1
.X±0.3	.X±2'	APPD: 刘振岭	DWG NO.: JKUN-GCCP-1248
.XX±0.25	.XX±1'	CHKD: 王亮	SCALE: 1 : 1
--	--	DR: 蒋建银	SHEET: 1 / 1