

A

B




C

D

E



F

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30

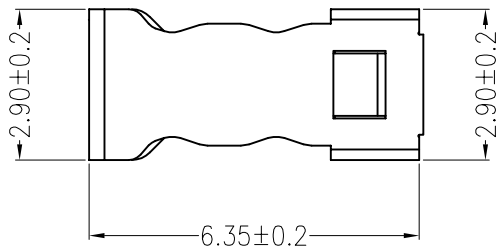

主要技术参数 Main Specifications


线数 (Poles): 01
 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
 绝缘电阻 (Insulation resistance): $\geq 800\text{M}\Omega$
 额定电压 (Rated voltage): 250 V AC DC
 额定电流 (Rated current): 2.0A AC DC
 耐电压 (Withstand Voltage): 1500V AC/minute
 温度范围 (Temperature Range): $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$

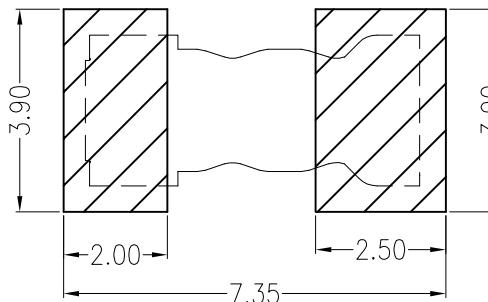

Board Layout

ORDER INFORMATION:

L024-01-T2CB-R			
PART No.			
No. FOR CIRCUITS:			PACKAGING: R=REEL P=PE
PLASTIC MATERIAL:			PLATING: B=MATTE Sn
T2C=PBR (BEIGE)			

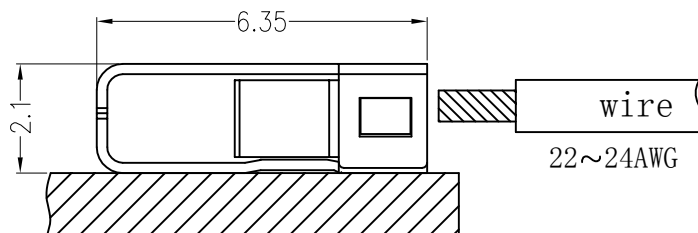

Assembly Layout

C					
B					
A	CONTACT	1 PCS	PhosphorBronze	MATTE Sn-plated	
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH	
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.					TITLE: -
X.±0.5	X.±5'	USE: CUSTOMER		PART NO.: L024-01-T2CB-R	
.X±0.3	.X±2'	APPD: 邵敬和		DWG NO.: JKUN/GCCP-0045	
.XX±0.25	.XX±1'	CHKD: 田峰		SCALE: 1 : 1	
--	--	DR: 周秀龙		SHEET: 1 / 1	
UNITS: mm					

A

B

C

D

E

F